

M A I N T A I N E D A Q U I L I N E F O O T S W I T C H



▲ The LINEMASTER Maintained Aquiline foot switch offers reliable, high quality, long-life performance at a low cost. Available with a high impact polymeric cover or a robust cast aluminum cover as standard models. The series plug cordset assembly will handle all 125 VAC requirements up to 15 amps and 1/2 HP. Featuring a skid-proof basepad and ribbed cover for sure footed control by the operator. Available accessories for this switch include full and oversized steel guards and our new polymeric awareness cover. Special variations are available to the Original Equipment Manufacturer in production quantities.



LINEMASTER Switch Corporation
Tel (860) 974-1000

29 Plaine Hill Road, P.O. Box 238
Woodstock, Connecticut 06281-0238 USA
Fax (800) 974-FOOT(3668)


www.linemaster.com

FEATURES:

- Press On-Press Off
- Easy to Operate
- Full and Oversized Guards Available
- Non-Skid Base Pad
- Raised Ribs on Treadle For Positive Traction During Operation
- Rustproof and Corrosionproof Plastic Model
- Integrated Adjustable Strain Relief Clamp



Single Model Plastic And Metal
 Size: 3.436 in x 1.093 in x 3.989 in
 Plastic: Weight: 3.6 oz.
 Metal: Weight: 15.3 oz

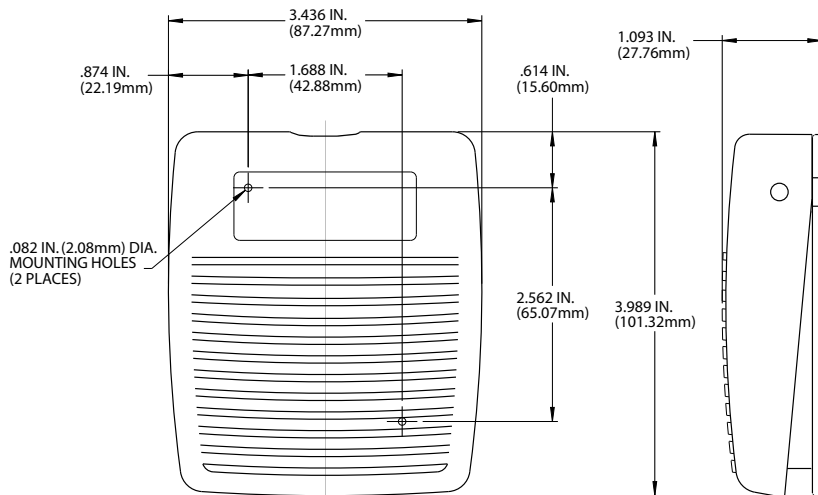

NOTE: ALL DIMENSIONS ARE FOR REFERENCE ONLY.

Agency Approval	EN 60529 Degree of Protection	Catalog Number	Description	Color	Circuit	Form	Electrical Ratings
	IP20	971-DJ	Polymeric / Maintained	Black	SPST-NO	A	12 A 1 H.P. 250 VAC 1/2 H.P. 125 VAC
		971-DC3J ¹					
		971-DC26J ²					
		971-DC28J ³					
		971-DJM	Die Cast Zinc / Maintained				
		971-DC3JM ¹					
		971-DC36JM ⁴					
		971-DC38JM ⁵					

¹Supplied with 8 ft. 16/3 cord with 3 prong series plug (Restricts use of foot switch assembly to 125 VAC Only). Plastic model is not grounded. ²Supplied with 6 ft. 16/2 cord, no ground. ³Supplied with 8 ft. 16/2 cord, no ground. ⁴Supplied with 6 ft. 16/3 cord, grounded. ⁵Supplied with 8 ft. 16/3 cord, grounded.