

TREADLITE II

F O O T S W I T C H



- ▲ The Linemaster Treadlite II offers reliable, high quality, long-life performance. The rugged formed steel low profile housing ergonomically helps reduce operator fatigue. The non-skid cover and base pads provide for a sure and stable actuation. Available as a single, twin, triple and a wide range of OEM model variations. Momentary and maintained functions are offered in a variety of models. The Treadlite II is also offered watertight with a Stainless Steel housing providing the added benefits of corrosion resistance, light weight strength, hygienic properties and aesthetic appeal. Full and Oversized guards are available for added protection.





LINEMASTER Switch Corporation
Tel (860) 974-1000

29 Plaine Hill Road, P.O. Box 238
Woodstock, Connecticut 06281-0238 USA
Fax (800) 974-FOOT(3668)

FEATURES:

- Compact Size and Low Profile
- Easy to Operate
- Adjustable Strain Relief Connector
- Momentary and Maintained Function
- Standard Single and Twin Models with Triple, Quad, and OEM Variations available
- Stainless Steel Models Watertight to IP68
- Full and Oversized Guards Available

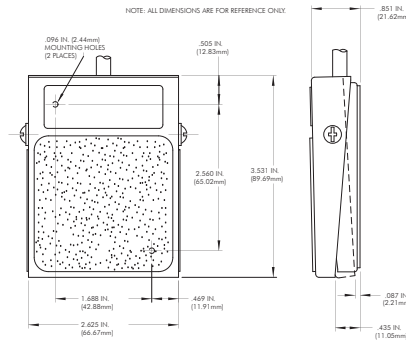

Single (Metal)

Size: 2.625"W x .851"H x 3.531"D
Weight: 7 oz.

Single (Stainless Steel)

Size: 2.625"W x .851"H x 3.531"D
Weight: 6.8 oz.

Twin (without Channel)

Size: 6.125"W x 1.488"H x 3.562"D
Weight: 1.86 lbs.

Twin


Size: 7.550"W x 1.320"H x 5.375"D
Weight: 3.10 lbs.

Triple

Size: 10.703"W x .925"H x 5.125"D
Weight: 2.903 lbs

Quadruple

Size: 14.750"W x .925"H x 5.125"D
Weight: 4.23 lbs.



Agency Approval	Catalog Number	Description	Circuit	Form	Electrical Rating
	T-91-S	Momentary	SPDT	C	15 A 125-250 VAC 1/2 H.P. 125-250 VAC
	TWIN T-91-S	Momentary	Each Side SPDT	C	
	T-91-D	Maintained	SPDT	C	
	T-91-SC36*	Momentary	SPDT Wired N.O.	A	10 A 125-250 VAC 1/2 H.P. 125-250 VAC
	T-91-DC36*	Maintained	SPDT Wired N.O.	A	
	T-91-SC36A*	Momentary	SPDT Wired N.O.	A	15 A 125-250 VAC 1/2 H.P. 125-250 VAC
	TWIN T-91-SC48*	Momentary	Both Sides SPDT Wired N.O.	A	13 A 125-250 VAC 1/2 H.P. 125-250 VAC
	T-91-SC3±	Momentary	SPDT Wired N.O.	A	10 A 125 VAC 1/2 H.P. 125 VAC
	T-91-DC3±	Maintained	SPDT Wired N.O.	A	
	T-91-SC3A±	Momentary	SPDT Wired N.O.	A	15 A 125 VAC 1/2 H.P. 125 VAC
	T-91-PS±±±	Momentary	SPST Wired N.O.	A	3 A 30 VAC Max. Class 2 Circuits Only
	T-91-PSNC±±±	Momentary	SPST Wired N.C.	B	
	T-91-SWANOS°	Momentary	SPST N.O.	A	3 A 125-250 VAC
	T-91-SWAN03S°°	Momentary	SPST Wired N.O.	A	3 A 125 VAC
	T-91-SWAN038S°°°	Momentary	SPST Wired N.O.	A	3 A 125-250 VAC

THESE ARE LOW POWER DEVICES AND MUST BE USED ONLY IN THOSE APPLICATIONS WHERE SUITABLE DESIGN CONSTRAINTS AND SAFETY PRECAUTIONS ARE MET.

* Supplied with 6 ft. 18/3 cord without plug. Green lead grounded. ** Supplied with 6 ft. 14/3 cord without plug. Green lead grounded.

*** Supplied with 8 ft. 16/4 cord without plug. Green lead grounded.

± Supplied with 6 ft. 18/3 cord with 3 prong series plug. Green lead grounded. ±± Supplied with 8 ft. 14/3 cord with 3 prong series plug. Green lead grounded.

±±± Supplied with 8 ft. 22/1 audio cable with 2 contact .250 diameter phone plug, not grounded.

° Supplied without cord set. °° Supplied with 8 ft. 18/3 cord and 3 prong series plug, green lead grounded. °°° Supplied with 8 ft. 18/3 cord without plug, green lead grounded.